

WE INCLUDE PROGRESS



» EXTRUSION TECHNOLOGY

» MARX SMART CONTAINER

» HPC HIGH-POWER CARTRIDGES

» CONTROL & SOFTWARE

» INDUCTIVE BILLET HEATING

» TOOL STATIONS & PREHEATING STATIONS

» SERVICE & MAINTENANCE

» TRAINING & TROUBLESHOOTING

PERSUASIVE TECHNOLOGY

## EXTRUSION TECHNOLOGY



## Process controlled containers

### **SMART CONTAINER®** BY MARX TECHNOLOGIES

The current state of development of the process-controlled “**Smart Containers**” means that they can be heated up and regulated at weights of between 500kg and over 100 tons in segmented heating zones.

The **high-power heating cartridges** can be produced with up to three heating zones and achieve a proven service life of up to 5 years and above depending on their intended purpose.

The zone arrangement is designed individually depending on the particular application, which include special solutions such as containers with oval inner liner, large external diameters or long containers.

The process is controlled based on the specific requirements, and is supported by segmented cooling zones as required.



## MARX Smart Container



### Container heating system for Aluminium 25MN


Press:	25MN
Length:	47" (1,200mm), Ø 39" (1,000mm)
Weight:	7t
Heating zones:	2



### Welded connections for the Marx HPC-Heating cartridges


#### Advantages:

- » Lower costs through reduced effort during assembly
- » Stable structure of the complete heating system
- » Permanent contact security for the cartridge connections
- » Safe operation due to bigger distances between the live-parts
- » Easy repair due to a clear and simple structure

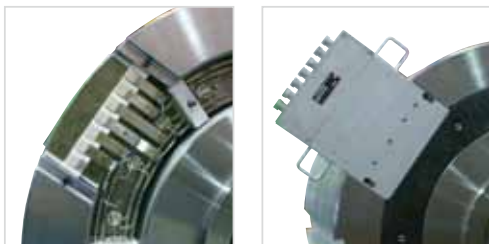

### MARX Quick-Connector

- » Rapid disconnection and reconnection of the power circuits with pressure contacts used for frequent change of format and container

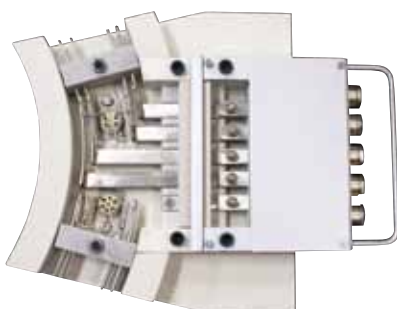

### MARX Compact-Connector

- » For containers which are placed inside the press for a longer period it is recommended to use the Compact-Connector with threaded power contacts



## MARX Smart Container




### Container heating system for Aluminium 160MN

Press: 160MN  
 Length: 109" (2,770mm), Ø 93" (2,350mm)  
 Heating zones: 4  
 Billet: Ø 24" (615mm), 29" (735mm)



### Container heating system for Aluminium 80MN

Press: 80MN  
 Container: Length: 61" (1,550mm), Ø 63" (1,590mm)  
 Weight: 22t  
 Billet: Length: 43" (1,100mm);  
 Ø: 11"x24" (270x600mm)  
 Heating zones: 8

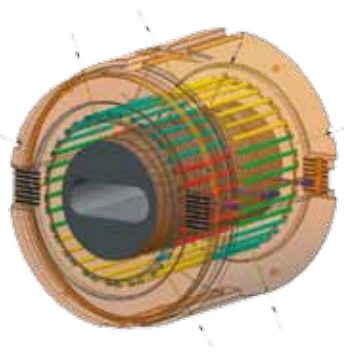

Control System for 80MN press for different containers  
 (rectangular and round inner liners)

Control system: Switchable between 4, 6 or  
 8 heating zones  
 up to 18 temperature measuring points



### Container heating system for Aluminium 200MN

Press: 200MN  
 Container: Length: 83" (2,100mm), Ø 120" (3,050mm)  
 Weight: 100t  
 Heating zones: 4  
 Billet: 79" (2,000mm), Ø 26" (650mm),  
 31" (800mm), 35" (900mm), 43" (1,100mm)

## MARX Smart Container



### Container heating system for Brass 130MN

Press:	130MN
Container:	Length: 126" (3,200mm), Ø 88" (2,240mm)
Weight:	100t
Heating zones:	4
Cooling zones:	10
Billet:	length: 118" (3,000mm); Ø 18" (450mm)

## Special applications



### Bolster-heating

Dimensions of the Bolster:	Length: 8" (200 mm), Ø 15" (380mm)
Rated power:	6kW
Main voltage:	230V
Heating zones:	2 (top/bottom)



### Horse-Shoe (Die-slide) – heating

Dimensions of horse shoe:	11.4"x19.7"x19.9" (290x500x505mm) (WxDxH)
Bore-diameter heaters:	1" (26mm)
Rated power:	6kW
Main voltage:	400V
Heating zones:	1



### Container heating system for forging press tools

Dimension:	8" (200mm), Ø 24" (600mm)
Weight:	410kg
Power:	10,5kW
Input voltage:	400V
Heating zones:	1

## HPC and Smart Container equipment



### HPC High-Power Cartridges

- » up to 3 heating zones in one cartridge
- » Lifetime: up to 5 years and above



### Software modul – Compatible with Siemens and Allen Bradley

- » Visualized process control for Smart Container
- » Upgrade for existing heating systems



### Special-Components for connection, insulation and temperature-recording

- » Multiple Thermocouples with up to 3 measuring points for simultaneous recording of several temperatures in extrusion containers
- » Customized insulation components



### Special thermocouples to remain in the containers

Ideal, if the temperature detection of positions is required which are not reachable from the outside or where the container housing cannot be machined with drillings.





## Billet heating equipment

- » Billet heating equipment in compact design for laboratory purposes, universities and operators of small presses; Stand-alone system, energy-efficient, optional with protective gas connection to the surface protection.
- » The converter, induction coil, power unit, recooling system, control and operator cabinet with operator panel are combined within a frame to form a single unit
- » Compact dimensions, for example:
  - approx. 35"x28"x83" (900x700x2,100mm) (WxDxH)
  - With billet data: Length 8" (200mm), Ø up to 2.4" (60mm)
  - Temperatures up to 560°C
- » Building, repair and modernization of coils for billet heaters
- » Spare parts and accessories for billet heating plants





## Tool stations and Preheating stations

In order to meet today's modern demands, **special tool stations** have been developed at MARX, to heat up the extrusion press tools to an **optimal process temperature**.

The **container preheating stations** are either fitted with independent heating systems, or can be operated via the resistance heating system integrated in the container. In this case, power is supplied automatically via a pneumatic contact unit. The heating process is precisely controlled via integrated controllers.





## Tool stations and Preheating stations



### Container preheating station

to preheat containers outside of the press. The cover is moved by manual operation. Station with pneumatic operated power supply unit for the container own heating.

Dimensions:

Container: Length: 47" (1,200mm),  
Outer Ø 53" (1,345mm)

Station: 91"x106"x98" (2,300x2,700x2,500mm)  
(WxDxH)

Nominal temperature: 400°C



### Die heating oven for single dies

with resistance heating system, air circulation and motor operated cover

Usable dimensions: 39"x39"x39" (1,000x1,000x1,000mm)  
(WxDxH)

Rated power: 64kW

Main voltage: 400V / 50Hz

Working temperature: 400°C ± 5 %

Max. temperature: 500°C ± 5 %

Ventilator power: 2m³/sec.



### Die heating oven for several dies


Usable dimensions: 79"x51"x28" (2,000x1,300x700mm)  
(WxDxH)

Rated power: 2x25kW

Input voltage: 400V, 50Hz

Nominal temperature: 400°C

Ventilator power: 2m³/sec.

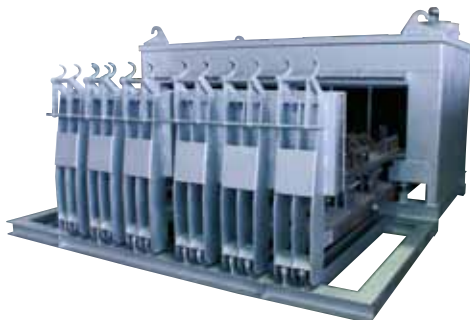

### Heating oven with drawers for 7 press stems


Usable dimensions: 63"x134"x20" (1,600x3,400x500mm)  
(WxDxH)

Rated power: 2x25kW

Input voltage: 400V, 50Hz

Nominal temperature: 400°C

Ventilator power: 2m³/sec.

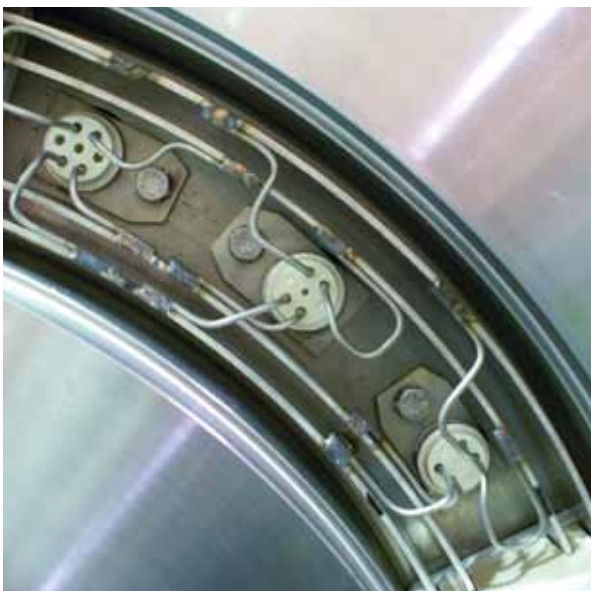

## Service and maintenance

### Modernisation of heating systems

- » Conversions from induction heating to resistance heating
- » Conversions from external heating (holder) to internal resistance heating
- » Conversions to „SMART CONTAINER SYSTEM“

### Repair service

- » Container heating systems (resistance heating, induction heating)
- » Billet heating systems
- » Tool stations and preheating stations

### Spare parts service

- » High-Power Cartridges (HPC)
- » Customized insulation components
- » Multiple Thermocouples
- » Quick-Connectors

## Training sessions

- » Change of heating cartridges
- » Heating assembly
- » Trouble shooting
- » On site support

## Service and maintenance



### **Welded connections for the Marx HPC-Heating cartridges**

The welded design of the heating cartridge connections provides all the advantages of a modern heating system for containers.

The reduced need for individual components results particularly in properties that meet the requirements for ever increasing availability, heating durability and ease of maintenance.



### **Copper welding of an induction heating**

All connections are made in a special protective gas welding process. The combination of heating construction in conjunction with modern insulation materials guarantee a long service life of the heating systems.



### **Container with induction heating system**

New manufacturing and repair of induction heating as a substitute in extrusion containers of all worldwide existing presses sizes.

Internal heating connections in welded and soldered version, soldered version also with nickel plated heater rods and interconnection bars. Power-contacts with silver-plates.



### **Assembled ready to install**

Advantages:

- » Accurately fitting, quick and simple self-assembly of the resistance heating system





Donauwörth / Germany



Hennigsdorf / Germany



Youngstown / Ohio / USA



Iserlohn / Germany

#### MARX GMBH & CO. KG

Lilienthalstraße 6-13  
58638 Iserlohn  
Postfach 2022  
58590 Iserlohn

Phone + 49 2371 2105-0  
Telefax + 49 2371 2105-11  
E-Mail [info@marx-gmbh.de](mailto:info@marx-gmbh.de)  
Web [www.marx-gmbh.de](http://www.marx-gmbh.de)

24h emergency call  
+ 49 172 279 95 64

#### MARX ELEKTROWÄRME GMBH

Philipp-Pfarr-Straße 6  
16761 Hennigsdorf

Phone + 49 3302 200930  
Telefax + 49 3302 200938  
E-Mail [ew@marx-gmbh.de](mailto:ew@marx-gmbh.de)

#### MARX OFENBAU GMBH

Joseph-Gänsler-Straße 12  
86609 Donauwörth

Phone + 49 906 3090  
Telefax + 49 906 22576  
Cell + 49 171 235 66 91  
E-Mail [ofenbau@marx-gmbh.de](mailto:ofenbau@marx-gmbh.de)

#### MARX LLC, USA

1221 Velma Court  
Youngstown, OH 44512

Phone + 1 330 788 0864  
Telefax + 1 330 788 4946  
E-Mail [sales@marx-us.com](mailto:sales@marx-us.com)  
Web [www.marx-us.com](http://www.marx-us.com)